
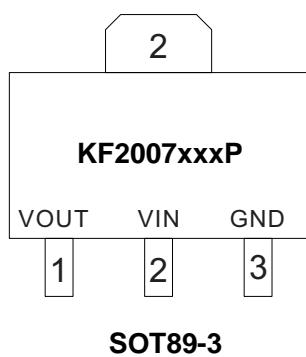


## Voltage Detectors , KF2007 Series

### General Description

KF2007 Series are a set of three-terminal low power voltage detectors implemented in CMOS technology. Each voltage detector in the series detects a particular fixed voltage ranging from 2.0V to 7.0V. The voltage detectors consist of a high precision and low power consumption standard voltage source, a comparator, hysteresis circuit, and an output driver. CMOS technology ensures low power consumption.

### Pin Configuration




### Features

- Highly accuracy: ±1%
- Low power consumption: TYP 1.8uA (Vin=3V)
- Detect voltage range: 2.0V~7.0V in 0.1V increments
- Operating voltage range: 1.5V~18V
- Detect voltage temperature characteristics: TYP±0.9mV/°C
- Output configuration: CMOS
- Package: SOT-23-3, SOT-89-3, TO-92

### Typical Application

- battery checkers
- Level selectors
- Power failure detectors
- Microcomputer reset
- Battery backup of Memories

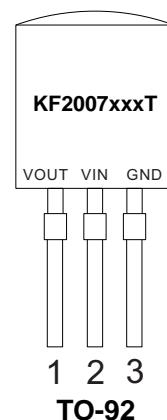

### Typical Application Circuit

